


# Datasheet

EDC/38C/6W/XXX/230V/A001

- Ver2.0 -

## EDC/38C/6W/XXX/230V/A001

- Compatible with most TRIAC dimmers
- High Power Conversion Efficiency ( $>0.85$ )
- High Power Factor ( $>0.95$ )
- Low THD ( $<20\%$ )
- Zhaga Standard Mounting Holes

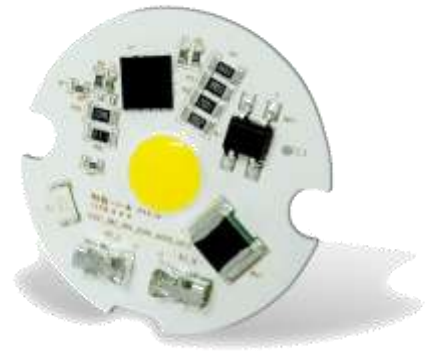

Lumens CO., LTD.

12, Wongomae-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Korea

[www.lumensleds.com](http://www.lumensleds.com)

# LUMENS

## 1. Product Description

### \* Description


- The EDC(Egg Drop COB) series module is designed for the high power operation to get the high flux output applications.
- It incorporates the state of the art SMD LEDs with high reliability and semiconductor AC direct drive ICs.
- It is ideal for the indoor or down light applications.

### \* Features

- High performance, High brightness
- No emission of harmful short wavelength light(No UV radiation)
- High power conversion efficiency(>0.85)
- High power factor (>0.95)
- Low THD(< 20%)
- Low EMI
- Thermal shutdown function embedded(150°C)
- RoHS compliant
- REACH compliant

### \* Applications

- Down Light (Indoor Lighting)
- Spot Light

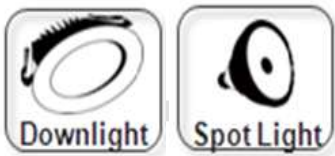

LUMENS

## 2. Absolute Maximum Ratings

Parameters	Symbol	Min Value	Max Value	Unit
Maximum power dissipation	Pd	-	6.6	W
Maximum operation voltage	Vop	-	250	V
Operation temperature	Top	-40	+85	°C
Storage temperature	Tst	-40	+100	°C

- Operation temperature is not related to the lifetime.

## 3. Product Name Method

(ex.Eggdrop)



Eggdrop											
EDC	57	C	XXW	X	XX	XXXV	A	0	0	0	V1_0
EggDrop	PCB	'C'= Circular	'Power'= 4 Watt	'7'= 70Ra+	'27'= 2700K	Input	type	Management code			
	'size'= 38mm Ø		6 Watt	'8'= 80Ra+	'30'= 3000K	Voltage	'A'=A				
	47mm Ø		8 Watt	'9'= 90Ra+	'35'= 3500K	230V	'B'=B				
	57mm Ø		10 Watt		'40'= 4000K						
			12 Watt		'50'= 5000K	Or	'C'=C				
			15 Watt		'57'= 5700K	120V					
			20Watt								
			30Watt								
			40Watt								

### 1) Additional explanation

Product Family	Product Section		Product Description
			PCB > shape > Watt > CRI+CCT > IV > Type > Management code
AC Module	Eggdrop	EDC	EDC_57C_XXW_XXX_XXXV_A000_V1_0

## 4. Electro-optical Characteristics (Tc=25°C & 55°C.)

Parameters	Symbol	Tc = 25°C			Tc = 55°C			Unit	Condition
		Min.	Typ.	Max.	Min.	Typ.	Max.		
Luminous Flux	Φv	456	504	-	432	480	-	lm	Vop=230V,2700K,CRI80
		468	522	-	450	498	-		Vop=230V,3000K,CRI80
		480	534	-	462	510	-		Vop=230V,3500K,CRI80
		492	546	-	474	522	-		Vop=230V,4000K,CRI80
		504	558	-	486	534	-		Vop=230V,5000K,CRI80
		390	432	-	366	408	-		Vop=230V,2700K,CRI90
		402	444	-	378	420	-		Vop=230V,3000K,CRI90
		414	456	-	390	432	-		Vop=230V,3500K,CRI90
		426	468	-	402	444	-		Vop=230V,4000K,CRI90
		438	480	-	414	456	-		Vop=230V,5000K,CRI90
Efficiency	lm/W	76	84	-	72	80	-	lm/W	Vop=230V,2700K,CRI80
		78	87	-	75	83	-		Vop=230V,3000K,CRI80
		80	89	-	77	85	-		Vop=230V,3500K,CRI80
		82	91	-	79	87	-		Vop=230V,4000K,CRI80
		84	93	-	81	89	-		Vop=230V,5000K,CRI80
		65	72	-	61	68	-		Vop=230V,2700K,CRI90
		67	74	-	63	70	-		Vop=230V,3000K,CRI90
		69	76	-	65	72	-		Vop=230V,3500K,CRI90
		71	78	-	67	74	-		Vop=230V,4000K,CRI90
		73	80	-	69	76	-		Vop=230V,5000K,CRI90

(1) At 230Vac, Tc = 25 °C & 55°C

(2) Φv is the total luminous flux output measured with an integrated sphere.

- Measurement accuracy : CRI(±3), Φv(±3%), Vf(±3.0V)

(3) Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.

Correlated Color Temperature	CCT	MacAdam 3Step			K	
Color Rendering Index	CRI	80/90	-	-	-	Vop=230V
Viewing Angle FWHM	2θ1/2	110	120	130	deg	Vop=230V
Operation Voltage	Vop	210	230	250	V	
Power Dissipation	Pd	5.4	6.0	6.6	W	Vop=230V
Operation Frequency	Fop	50 / 60			Hz	Vop=230V
Power Factor	PF	Over 0.99			V	Vop=230V
Current THD	ATHD	Less than 20%				Vop=230V

## 5. Characteristics

Item	Rating	Unit	Remark
Rated Lifetime	40,000	[hour]	L70B50 @ T <sub>c</sub> = 65°C

Item	Norminal*	Life**	Max.***	Unit
Temperature	65(Tc)	85(Tc, 65) L70B50	85(Tc)	°C

► Note :

\*Temperature used to specify performance of the module

\*\*Rated maximum performance temperature at which lifetime is specified

\*\*\*Rated maximum temperature, highest permissible temperature to avoid safety risk  
Shorten the life at the time of use more than the recommended use 65 °C Safety

All temperature are measured at the designated "Tc point" as indicated under Management drawing, Structure and Assembly section of this Data Sheet

► Condition


Above data doesn't mean the actual data but the calculated data.

Above data and graph were calculated by TM21, which was from LM80 data.

Lumen maintenance and lifetime are closely depending on thermal control using a heat sink.

Higher current than the rated can severely reduce a lifetime and lumen maintenance.


## 6. CIE Chromaticity Diagram

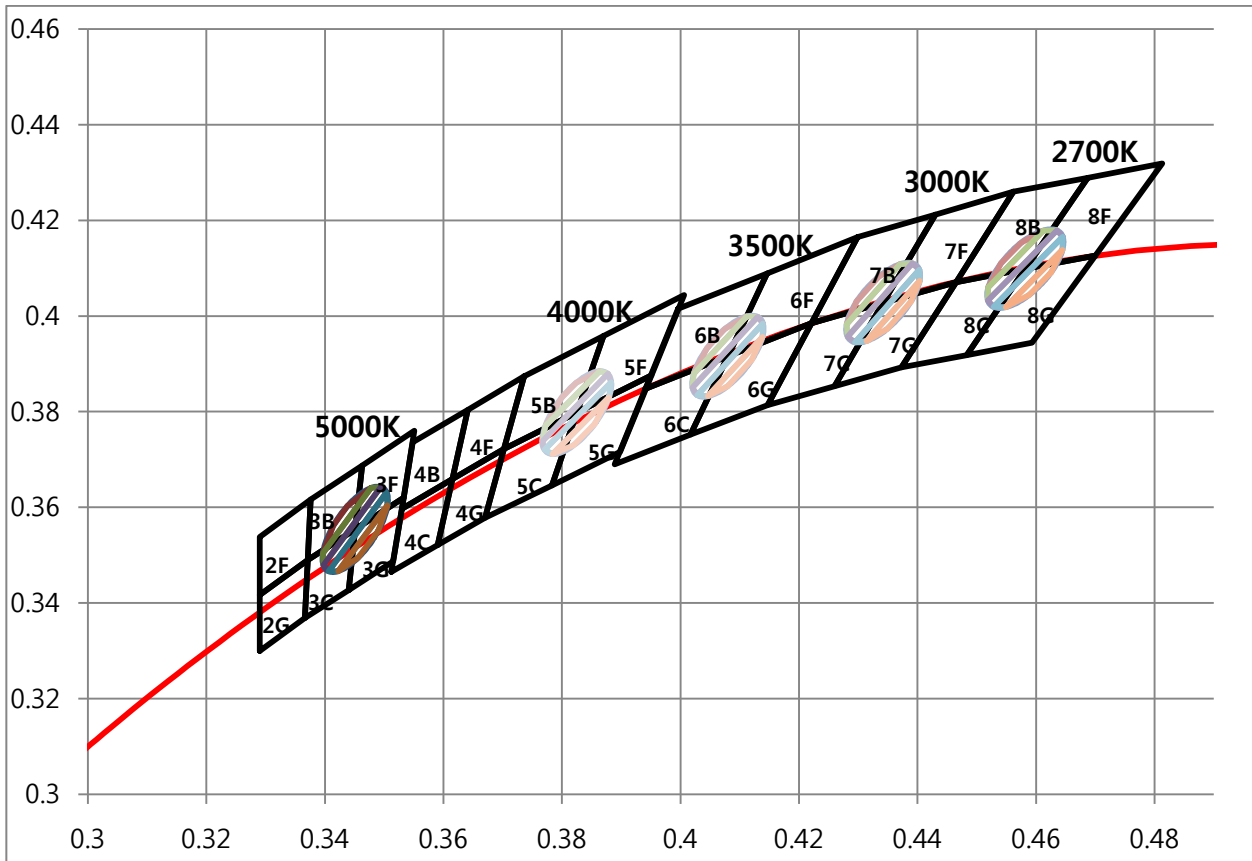

(1) Chromaticity coordinate groups are measured with an accuracy of  $\pm 0.01$


## 7. Chromaticity Coordinates

### 7-1. 2700K

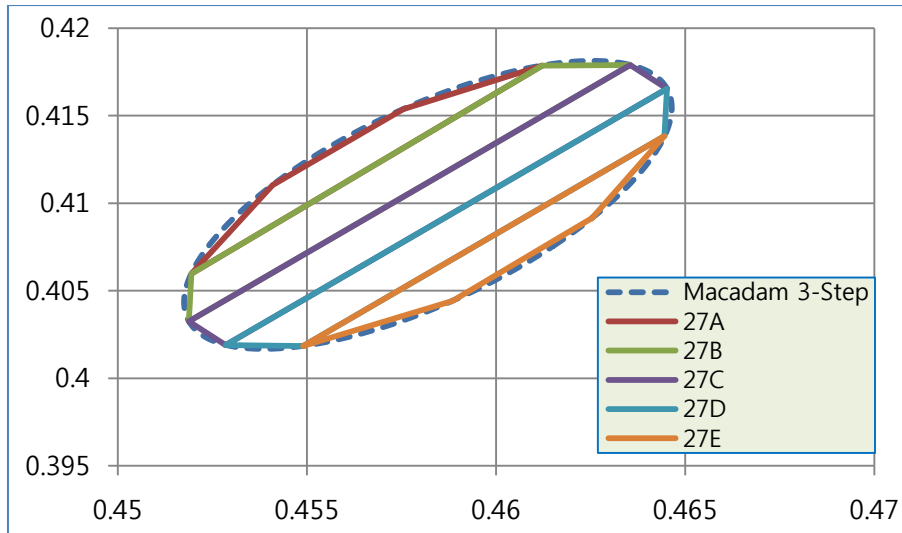


27A		27B		27C		27D		27E	
X	Y	X	Y	X	Y	X	Y	X	Y
0.4612	0.4179	0.4636	0.4179	0.4645	0.4165	0.4645	0.4138	0.4625	0.4092
0.4576	0.4154	0.4612	0.4179	0.4636	0.4179	0.4645	0.4165	0.4645	0.4138
0.4541	0.4110	0.4519	0.4060	0.4519	0.4033	0.4528	0.4019	0.4549	0.4018
0.4519	0.4060	0.4519	0.4033	0.4528	0.4019	0.4549	0.4018	0.4588	0.4044
0.4612	0.4179	0.4636	0.4179	0.4645	0.4165	0.4645	0.4138	0.4625	0.4092

### 7-2. 3000K

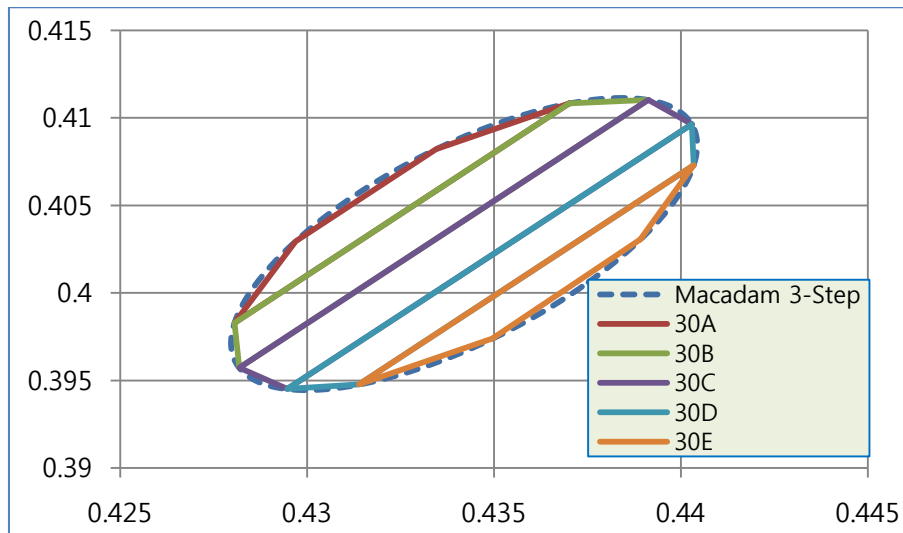


30A		30B		30C		30D		30E	
X	Y	X	Y	X	Y	X	Y	X	Y
0.4370	0.4108	0.4391	0.4110	0.4403	0.4097	0.4403	0.4073	0.4389	0.4031
0.4334	0.4082	0.4370	0.4108	0.4391	0.4110	0.4403	0.4097	0.4403	0.4073
0.4297	0.4030	0.4281	0.3983	0.4282	0.3957	0.4295	0.3945	0.4314	0.3948
0.4281	0.3983	0.4282	0.3957	0.4295	0.3945	0.4314	0.3948	0.4350	0.3974
0.4370	0.4108	0.4391	0.4110	0.4403	0.4097	0.4403	0.4073	0.4389	0.4031

7-3. 3500K

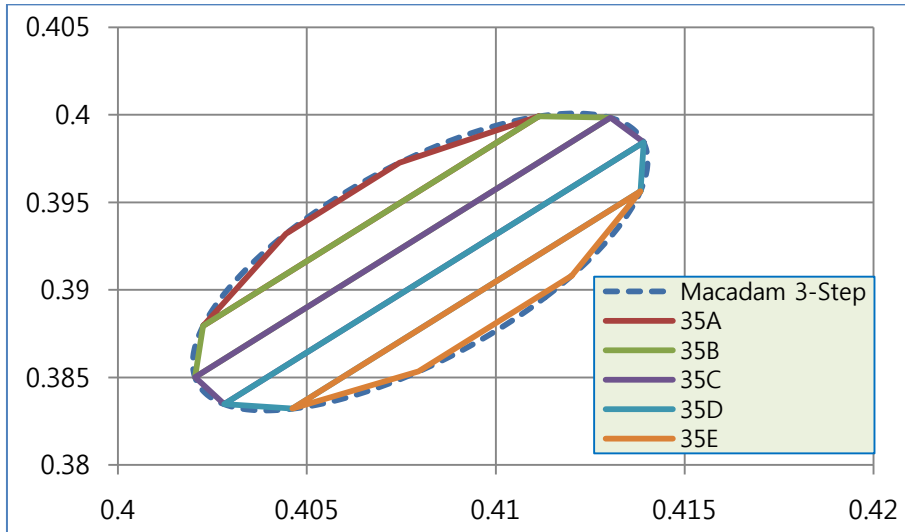

35A		35B		35C		35D		35E	
X	Y	X	Y	X	Y	X	Y	X	Y
0.4111	0.3999	0.4130	0.3998	0.4139	0.3984	0.4138	0.3956	0.4120	0.3908
0.4075	0.3973	0.4111	0.3999	0.4130	0.3998	0.4139	0.3984	0.4138	0.3956
0.4044	0.3932	0.4023	0.3879	0.4020	0.3850	0.4028	0.3835	0.4046	0.3832
0.4023	0.3879	0.4020	0.3850	0.4028	0.3835	0.4046	0.3832	0.4080	0.3853
0.4111	0.3999	0.4130	0.3998	0.4139	0.3984	0.4138	0.3956	0.4120	0.3908


7-4. 4000K

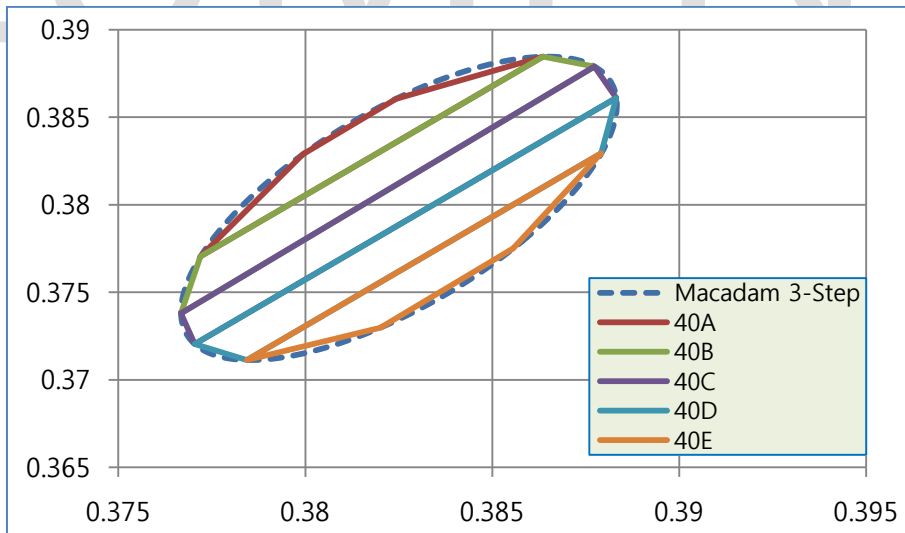

40A		40B		40C		40D		40E	
X	Y	X	Y	X	Y	X	Y	X	Y
0.3864	0.3885	0.3877	0.3879	0.3883	0.3861	0.3879	0.3829	0.3856	0.3775
0.3824	0.3861	0.3864	0.3885	0.3877	0.3879	0.3883	0.3861	0.3879	0.3829
0.3799	0.3829	0.3772	0.3771	0.3767	0.3738	0.3770	0.3720	0.3784	0.3711
0.3772	0.3771	0.3767	0.3738	0.3770	0.3720	0.3784	0.3711	0.3820	0.3730
0.3864	0.3885	0.3877	0.3879	0.3883	0.3861	0.3879	0.3829	0.3856	0.3775





7-5. 5000K

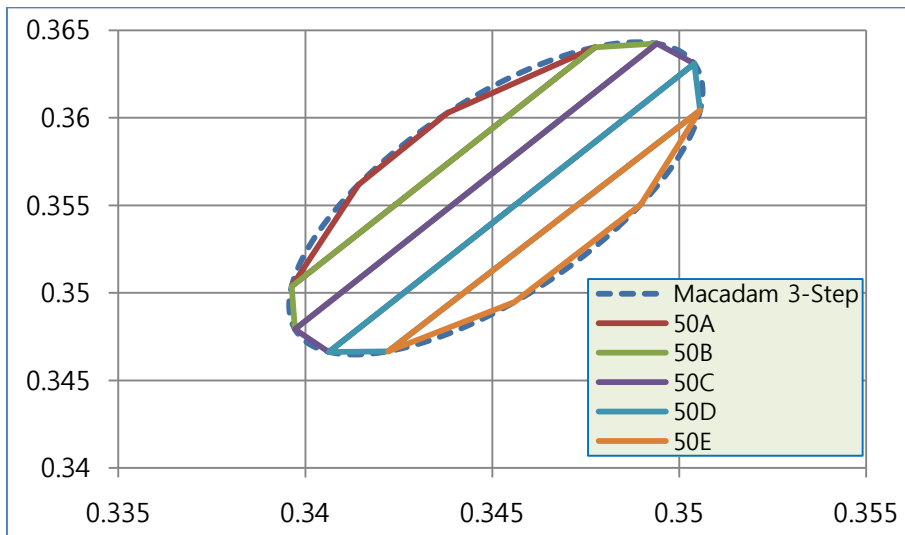


50A		50B		50C		50D		50E	
X	Y	X	Y	X	Y	X	Y	X	Y
0.3478	0.3640	0.3494	0.3642	0.3504	0.3631	0.3506	0.3604	0.3490	0.3550
0.3438	0.3603	0.3478	0.3640	0.3494	0.3642	0.3504	0.3631	0.3506	0.3604
0.3414	0.3562	0.3396	0.3504	0.3397	0.3479	0.3406	0.3466	0.3422	0.3467
0.3396	0.3504	0.3397	0.3479	0.3406	0.3466	0.3422	0.3467	0.3456	0.3495
0.3478	0.3640	0.3494	0.3642	0.3504	0.3631	0.3506	0.3604	0.3490	0.3550

## 8. Characteristic Graphs



### 8-1 Voltage Characteristics(Ta=25°C)

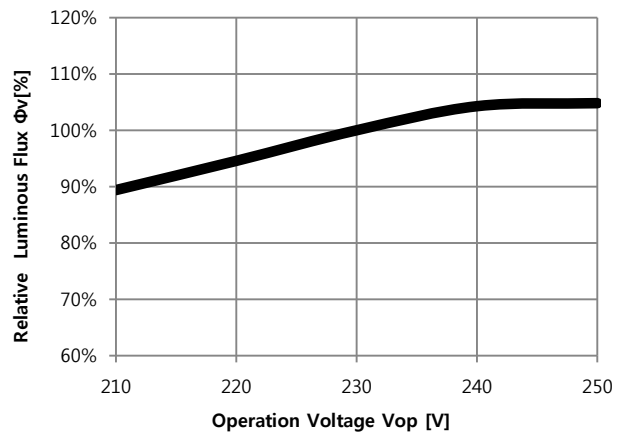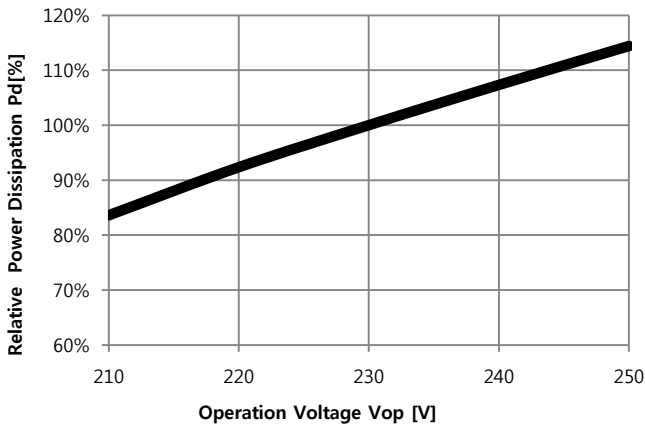


### 8-2 Spectrum Characteristics(Ta=25°C)

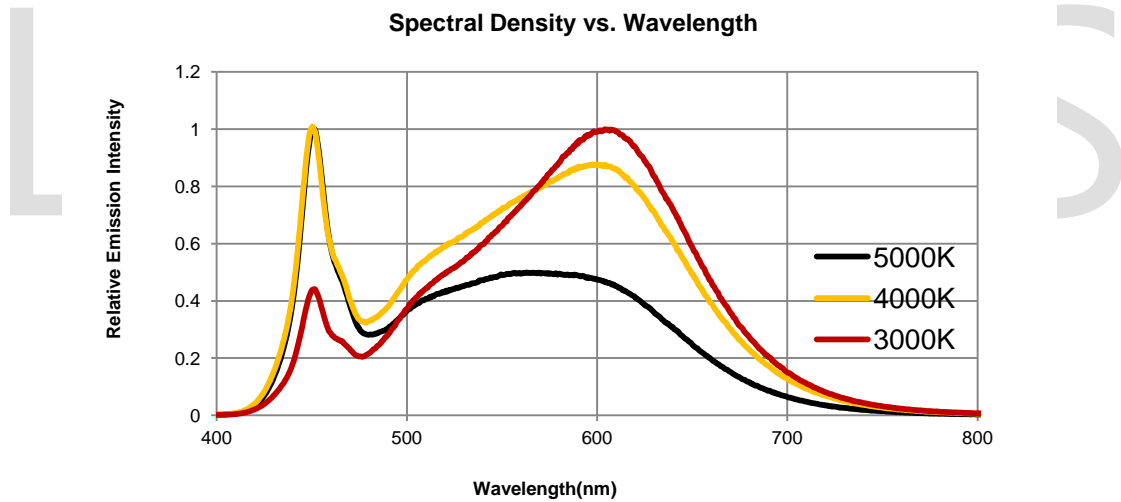

### 8-3 Temperature Characteristics

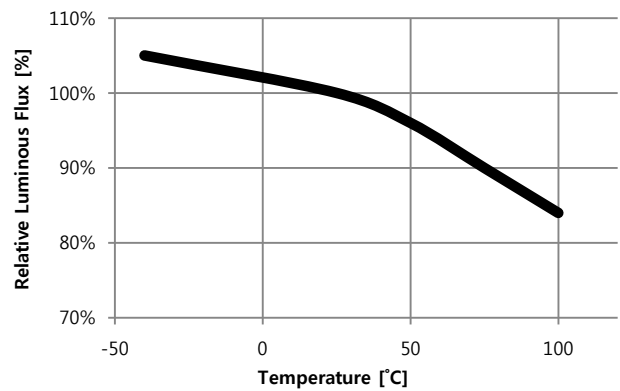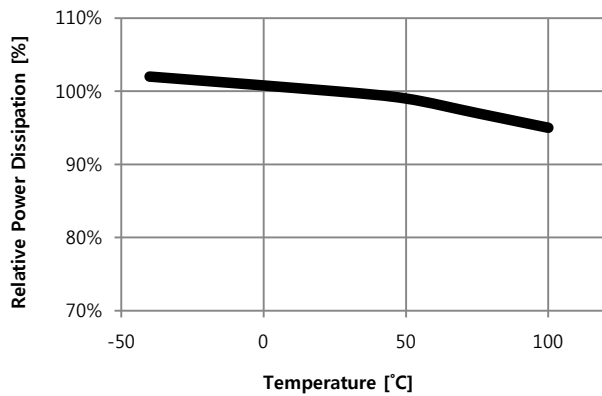

### 9. Outline Dimensions

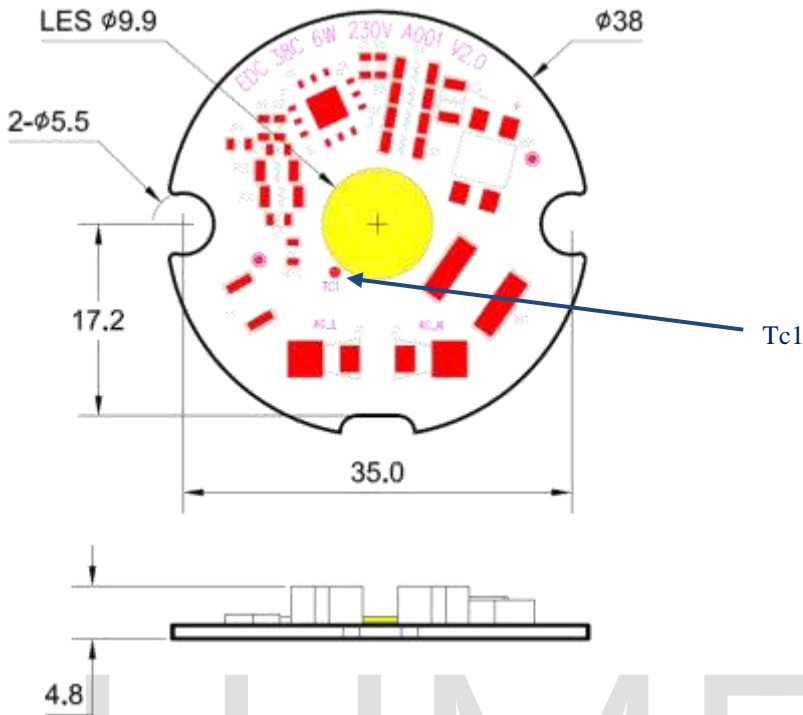

\* LES = Light Emitted Surface

Unit : mm

- 1) Outline Diameter : 38 $\phi$  Height(max) : 4.8mm
- 2) Tolerance - All measurements are  $\pm 0.1$  mm unless otherwise indicated.



## 10. EDC Module Marking

- A. Information Identification by report on the PCB (Silk)
  - Module Identification Code
- B. LED Module Laser Marking



<PCB Bottom>

B-1 Traceability Code Table

No	1	2	3	4	5	6	7	8	9	10	11	12	13
Marking	G	S	0	0	1	C	M	5	W	A	0	0	1
Meaning	SMT Site	Chip Manufacturer	Group No.			SMT Year/Month/Day			PCB Manufacturer	Classification	Serial No.		
Ciphers	1	1	3			3			1	1	4		
How to Use	G : K2	S : Semicon	001			1st Year (A~Z) 2nd : Month(A~M) 3rd : Day(A~Z,1~7)			W : Wavenics	A	001		

B-2 Traceability Code Marking Table

### SMT Site

SMT Site	D	L	B	K	Y	W	H	G	T
Code	1 <sup>st</sup> Vendor	2 <sup>nd</sup> Vendor	3 <sup>rd</sup> Vendor	4 <sup>th</sup> Vendor	5 <sup>th</sup> Vendor	6 <sup>th</sup> Vendor	7 <sup>th</sup> Vendor	8 <sup>th</sup> Vendor	9 <sup>th</sup> Vendor

**Chip Manufacturer**

Chip Manufacturer	F	P	E	T	K	I	V	G	O	S
Code	1 <sup>st</sup> Vendor	2 <sup>nd</sup> Vendor	3 <sup>rd</sup> Vendor	4 <sup>th</sup> Vendor	5 <sup>th</sup> Vendor	6 <sup>th</sup> Vendor	7 <sup>th</sup> Vendor	8 <sup>th</sup> Vendor	9 <sup>th</sup> Vendor	10 <sup>th</sup> Vendor


**SMT Year/Month/Day**

Year	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035							
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z							
month	01 <sup>st</sup> month	02 <sup>nd</sup> month	03 <sup>rd</sup> month	04 <sup>th</sup> month	05 <sup>th</sup> month	06 <sup>th</sup> month	07 <sup>th</sup> month	08 <sup>th</sup> month	09 <sup>th</sup> month	10 <sup>th</sup> month	11 <sup>th</sup> month	12 <sup>th</sup> month																			
	A	B	C	D	E	F	G	H	J	K	L	M																			
day	01 <sup>st</sup> day	02 <sup>nd</sup> day	03 <sup>rd</sup> day	04 <sup>th</sup> day	05 <sup>th</sup> day	06 <sup>th</sup> day	07 <sup>th</sup> day	08 <sup>th</sup> day	09 <sup>th</sup> day	10 <sup>th</sup> day	11 <sup>th</sup> day	12 <sup>th</sup> day	13 <sup>th</sup> day	14 <sup>th</sup> day	15 <sup>th</sup> day	16 <sup>th</sup> day	17 <sup>th</sup> day	18 <sup>th</sup> day	19 <sup>th</sup> day	20 <sup>th</sup> day	21 <sup>st</sup> day	22 <sup>nd</sup> day	23 <sup>rd</sup> day	24 <sup>th</sup> day	25 <sup>th</sup> day	26 <sup>th</sup> day	27 <sup>th</sup> day	28 <sup>th</sup> day	29 <sup>th</sup> day	30 <sup>th</sup> day	31 <sup>st</sup> day
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z	1	2	3	4	5	6	7

**PCB Manufacturer**

PCB Manufacturer	F	P	E	T	K	I	V	G	O	S
Code	1 <sup>st</sup> Vendor	2 <sup>nd</sup> Vendor	3 <sup>rd</sup> Vendor	4 <sup>th</sup> Vendor	5 <sup>th</sup> Vendor	6 <sup>th</sup> Vendor	7 <sup>th</sup> Vendor	8 <sup>th</sup> Vendor	9 <sup>th</sup> Vendor	10 <sup>th</sup> Vendor

C. LED Module Label

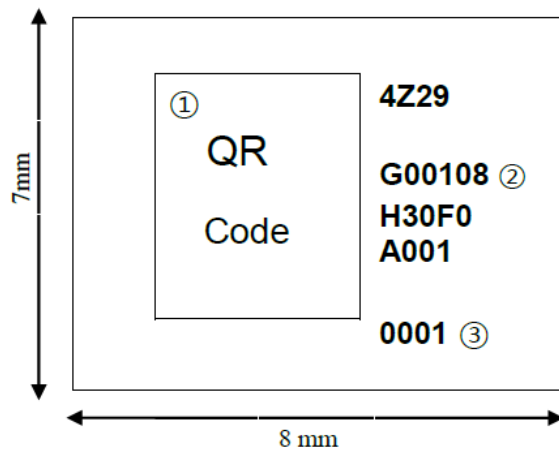

①	QR Code
②	Traceability Code
③	Serial No.

### C-1 Traceability Code Table

No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Marking	4	8	1	5	T	9	9	9	1	8	H	3	0	C	0	A	0	0	1	0	0	0	1
Meaning	SMT Year/Month/Day				SMT Site	Group No.			Watt	CRI	CCT	Volt	Default	LOT Serial No.				SMT Serial No.					
Ciphers	4				1	3			2	1	2	1		4				4					
How to Use	1st: Last No. of Year 2nd: Month (1~9,X,Y,Z) 3rd-4th: Day				T	999			18	H	30	C		A001				0001					

### C-2 Traceability Code Marking Table

#### SMT Year/Month

code	Year
4	2014
5	2015
6	2016

Month	1	2	3	4	5	6	7	8	9
Code	1	2	3	4	5	6	7	8	9
Month	10	11	12						
Code	X	Y	Z						

#### SMT Day

Day	1	2	3	4	5	6	7	8	9	10	11
Code	01	02	03	04	05	06	07	08	09	10	11
Day	12	13	14	15	16	17	18	19	20	21	22
Code	12	13	14	15	16	17	18	19	20	21	22
Day	23	24	25	26	27	28	29	30	31		
Code	23	24	25	26	27	28	29	30	31		

**SMT Site**

SMT Site	D	L	B	K	Y	W	H	G	T
Code	1 <sup>st</sup> Vendor	2 <sup>nd</sup> Vendor	3rd Vendor	4 <sup>th</sup> Vendor	5 <sup>th</sup> Vendor	6 <sup>th</sup> Vendor	7 <sup>th</sup> Vendor	8 <sup>th</sup> Vendor	9 <sup>th</sup> Vendor

**Watt**

Watt	1	2	3	4	5	6	7	8	9	10	...	99
Code	01	02	03	04	05	06	07	08	09	10	...	99
Watt	100	101	...	110	111	...	330	331	...	338	339	etc.
Code	A0	A1	...	B0	B1	...	Z0	Z1	...	Z8	Z9	ZZ

\* AO:100, BO:110, CO:120, DO:130, EO:140, FO:150, GO:160, HO:170, JO:180, KO:190, LO:200, MO:210  
 NO:220, PO:230, QO:240, RO:250, SO:260, TO:270, UO:280, VO:290, WO:300, XO:310, YO:320, ZO:330

**CRI**

CRI	Under 70	Min 70	Min 75	Min 80	Min 85	Min 90
Code	L	N	M	H	V	U

**CCT**

CCT	2700K	3000K	3500K	4000K	4500K	5000K	5700K	6500K
Code	27	30	35	40	45	50	57	65

**Volt**

Volt	100V	110V	120V	200V	220V	230V	240V	250V	277V	347V	DC	etc.
Code	A	B	C	D	E	F	G	H	J	K	X	Z

## 11. Package And Marking Of Product

### A. Tray Information


Size : 200mm x 190mm x 15.7mm

Color : Clear

Surface Resistivity :  $10^6 \sim 10^9 \Omega/\text{Sq.}$


### B. Package

5 pcs are packed in one tray.

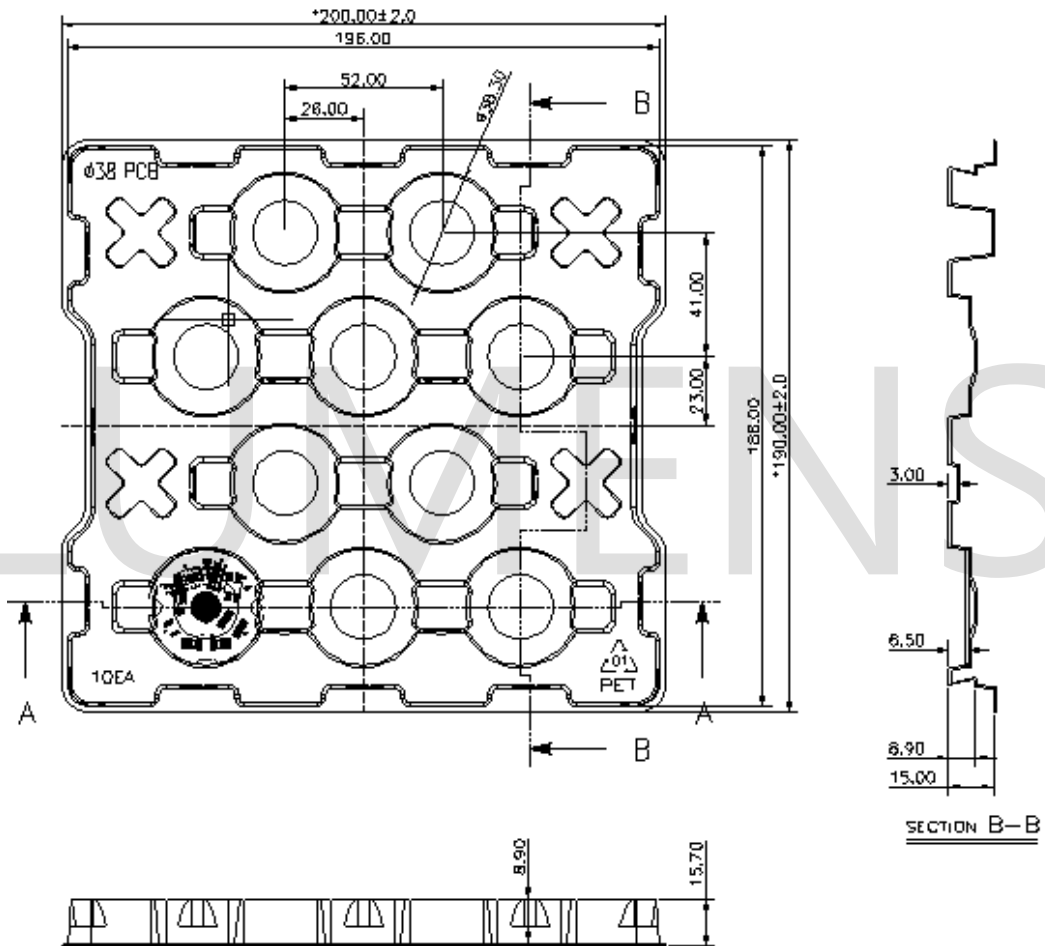

- Top view -



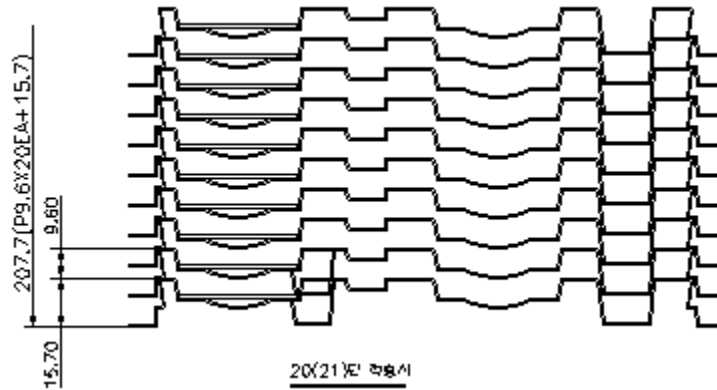


Stack up 21Layers  
 – Packing Tray –

C. Box Packing Specifications


Tray products (numbers of products are 10 pcs) packed.

There is no product on the top tray

21 Tray (total maximum number of products are 200pcs) packed in a box.

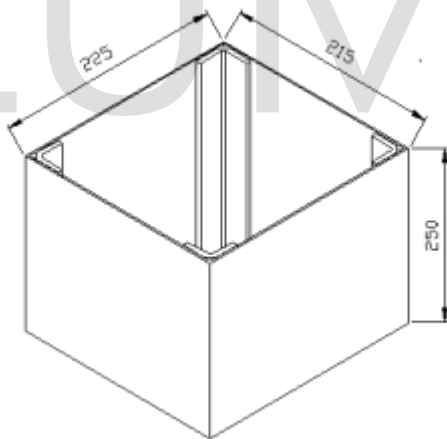


225 X 215 X 250 mm

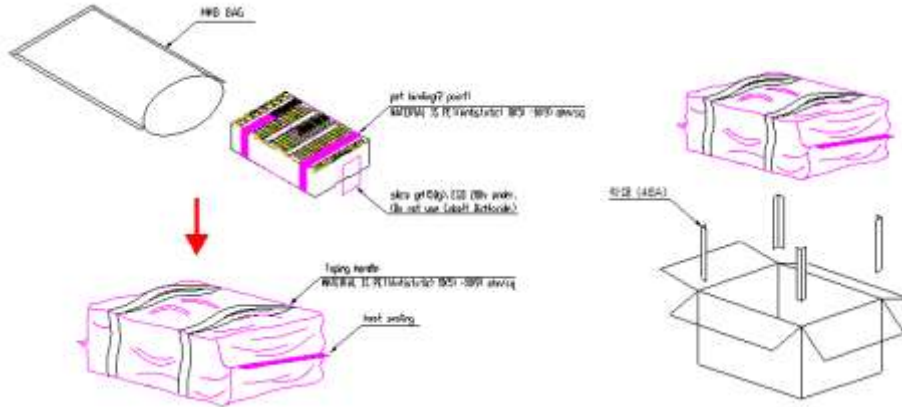

D. Pallet Loading


Box is stacked by 5 layers on the Pallet.  
Each layer has 20 boxes

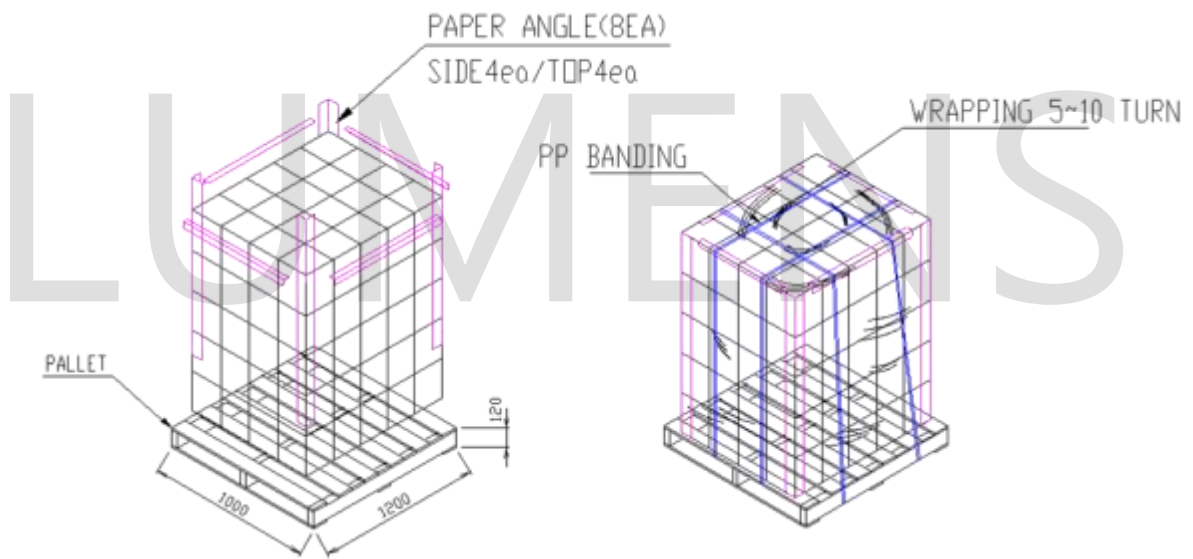

Size : 1,000mm(W) X 1,200mm(L) X 1,380mm(H)


E. Holder Label

EDC38C/6W/830/230V/A

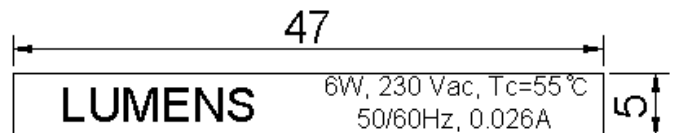

F. BOX Label

Specifying Customer, Model, Customer Part No, Lot No, Quantity  
On both trays and boxes, the same label is attached.

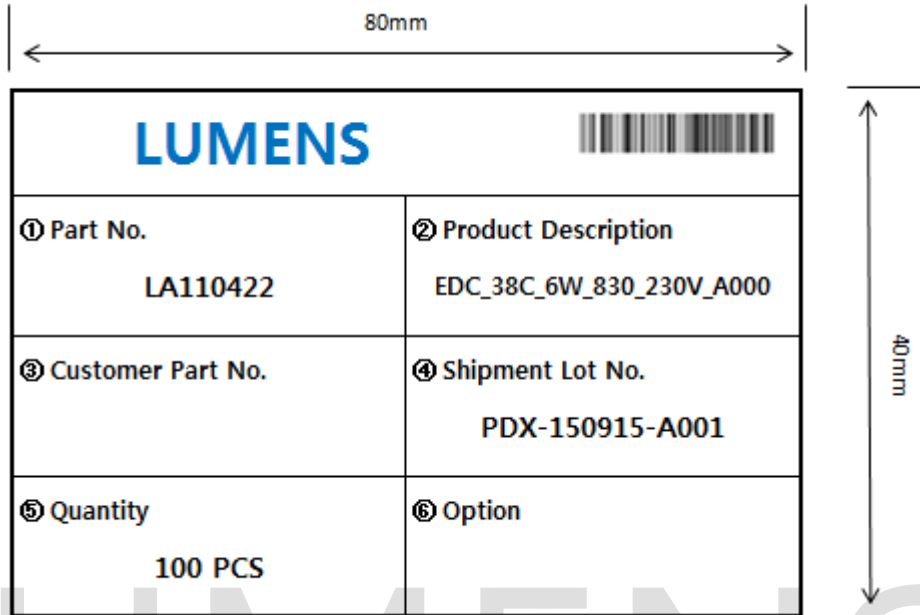

1. PART No
2. Model Name.
3. Customer Part NO
4. Shipment Lot No.
5. Quantity.

G. Shipment Lot No. Indication

No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
Marking	C	G	X	-	1	0	0	2	0	2	-	A	0	0	1	
Meaning	COB	SMT Site	Default	Default	Packing Year/Month/Day						Default	Default	Packing serial No.			
Ciphers	1	1			6								3			
How to Use	C : COB	G : K2			1st~2nd : Last two digits of Year 3rd~4th : Month(01~12) 5th~6th : Day(01~31)								001			

## 12. Cautions

- ◆ The LED Module itself and all its components may not be mechanically stressed.
- ◆ Make sure proper discharge prior to starting work.
- ◆ DO NOT touch any of the circuit board, components or terminals with body or metal while circuit is active.
- ◆ Installation of LED Module needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installation.
- ◆ DO NOT add or change wires while circuit is active.
- ◆ DO NOT make any modification on module.
- ◆ DO NOT use adhesives to attach the LED that outgas organic vapor.
- ◆ DO NOT use together with the materials containing Sulfur.
- ◆ The LED Module needs to be mounted on a heat sink providing adequate thermal dissipation.
- ◆ DO NOT exceed the values given in this specification
- ◆ Be cautious when soldering to board so as not to create a short between different trace patterns.
- ◆ Keep cautions not to apply higher voltage above the maximum rating. Otherwise damage may occur.
- ◆ Pay attention not to exceed the maximum operation temperature of 65 °C at the Tc1 Point when the modules are used in an enclosed environment.  
(  $T_{c1} + 30^{\circ}\text{C} \approx \text{Maximum LES temperature}(T_j)$  ) : Depends on specification of heat sink
- ◆ DO NOT assemble in conditions of high moisture and/or oxidizing gas such as Cl, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>x</sub>, etc.
- ◆ The module should also not be installed in end equipment without ESD (Electrical Static Discharge) protection.
- ◆ Damage by corrosion will not be allowed as defect claim. Lumens LED Module is recommended for Indoor use only.
- ◆ Great care should be taken not to see directly the operated lighting LED. If not the intense light should cause the damage to eye. Use proper goggles to protect your eyes during operation.
- ◆ Long time exposure to sunlight or UV can cause the lens to discolor.
- ◆ Moisture-Proof package
  1. When moisture is absorbed into the LED light engine it may vaporize and expand products during manufacturing. There is a possibility that this may cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture-proof pack is used to keep moisture to a minimum in the package.
  2. A pack of a moisture-absorbent material (silica gel) is inserted into the shielding bag. The silica gel changes its color from blue to pink as it absorbs moisture.
- ◆ Storage Conditions
  1. Before opening the package: The LED light engines should be kept at 30 °C or less and 90% RH or less. The LED light engines should be used within a year. When storing the LED light engines, moisture-proof packaging with moisture-absorbent material (silica gel) is recommended.
  2. After opening the package: The LED light engines should be kept at 30 °C or less and 70% RH or less. The LEDs should be soldered within 168 hours (7 days) after opening the package. If unused LED light engines remain, they should be stored in moisture-proof packages, such as sealed containers with packages of moisture-absorbent material (silica gel). It is also recommended to return the LED light engines to the original moisture-proof bag and to reseal the moisture-proof bag again.
  3. Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.
- ◆ “These modules are designed for built-in use only, so they could be used in class I luminaire or class II luminaire whose protection against electric shock does not rely on basic insulation only, additional safety precautions such as double insulation or reinforced insulation are provided.
- ◆ Recycling
 

Processing of electric and electronic equipment at the end of their service life (applicable in member countries of the European Union and other European countries operating a selective waste collection system).

This symbol, affixed to the product or its packaging, indicates that the product must not be processed with household waste. It must be brought to an electric and electronic waste collection point for recycling and disposal. By ensuring the appropriate disposal of this product you also help in preventing potentially negative consequences for the environment and human health. The recycling of materials helps preserve our natural resources. For further information regarding the recycling of this product, please contact your municipality, local waste disposal centre or the store where the product was purchased

**NOTE :**

All the information published by Lumens is considered to be accurate and reliable. However Lumens does not warrant that product descriptions or other contents in this data sheet is accurate, complete, reliable, current, or error-free. Lumens disclaims any and all warranties and liabilities of an kind, including without limitation, warranties of non-infringement or implied warranty of merchantability of fitness for a particular purpose. The appearance and specifications of the product can be changed to improve quality, performance and/or design without advance notice. Lumens products are not authorized for use as critical components in life support devices or systems without the express written approval from the managing director of Lumens.



# LUMENS